




Feature :  
 Membrane switch with silicon cover  
 Two blind keys design with two single LED  
 Waterproof : IP64  
 Approved by automotive brand before market (ISO/IEC 17025)

Application :  
 Automotive  
 Medical equipment  
 Electronic Smart Device




SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , DPST
CONTACT RATING	3.3 V DC , 100 mA
CONTACT RESISTANCE	CONTACT : 1 Ω MAX. / CONNECTOR : 5 Ω MAX. 1.5 V DC ; 0.1 A , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 200 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	450 ± 50 gf
OPERATING LIFE	1,000,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	1 ± 0.5 mm

► HOW TO ORDER

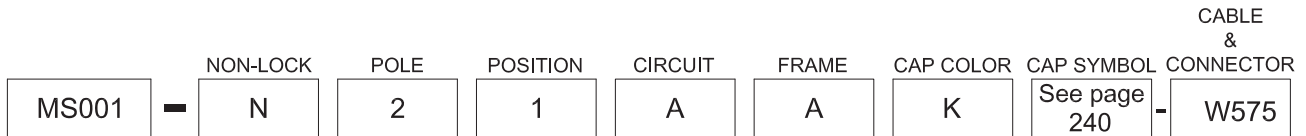

► DIMENSION

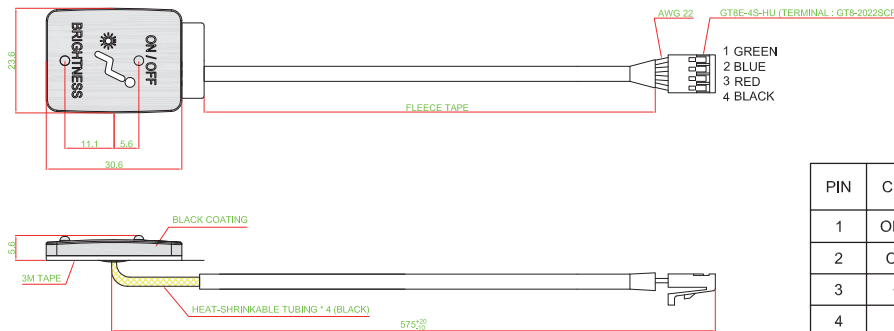

PIN	CIRCUIT	WIRE COLOR	WIRE TYPE
1	ON / OFF	GREEN	AVSS (AWG22)
2	COLOR	BLUE	AVSS (AWG22)
3	+3.3V	RED	AVSS (AWG22)
4	GND	BLACK	AVSS (AWG22)



- TACT SWITCH
- PUSH BUTTON SWITCH
- LED TOUCH SENSOR SWITCH
- 5 DIRECTION NAVIGATION SWITCH WITH LED
- MEMBRANE SWITCH
- LED LIGHT BAR
- SLIDE SWITCH
- ROTARY SWITCH
- ROCKER SWITCH
- DETECT SWITCH
- ENCODER
- INTERRUPTER
- MINIATURE MICRO SWITCH
- TELEPHONE HOOK SWITCH
- DOOR SWITCH
- MINI SIZE SOCKET
- KNOB
- CAP SYMBOL