



TACT
SWITCH

PUSH
BUTTON
SWITCH

LED TOUCH
SENSOR
SWITCH

5 DIRECTION
NAVIGATION
SWITCH

MEMBRANE
SWITCH

LED LIGHT
BAR

SLIDE
SWITCH

ROTARY
SWITCH

ROCKER
SWITCH

DETECT
SWITCH

ENCODER

INTERRUPTER

MINIATURE
MICRO
SWITCH

TELEPHONE
HOOK
SWITCH

DOOR
SWITCH

MINI SIZE
SOCKET

KNOB

CAP
SYMBOL

Feature :

Full color LED illuminated available
Long electrical life cycles
Good tactile feeling

Application :

Audio / video products
Instrumentation
Communication equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary Type , SPST with LED
CONTACT RATING	MAX. : 1mA , 20VDC or 5mA , 5VDC MIN. : 1mA , 5VDC
CONTACT RESISTANCE	200 Ω max. 5 V DC ; 1 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ min. , 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute
OPERATING FORCE	125±35 gf
OPERATING LIFE	300,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	1.3±0.3mm

LED SPECIFICATIONS		Value / LED Color						
ATTENTION LEDs are Electrostatic Sensitive devices 	Unit							
		Blue	Pure Green	Red	Yellow (5mA)	Orange	Green	White
LUMINOUS INTENSITY@20mA Iv	mcd	240	1000	180	24	250	50	400
Dominant Wavelength λD	nm	470	525	630	549	601	567	/
FORWARD VOLTAGE@20mA Vf	V	3.3	3.3	1.95	1.8	2.1	2.1	2.1





■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

► HOW TO ORDER




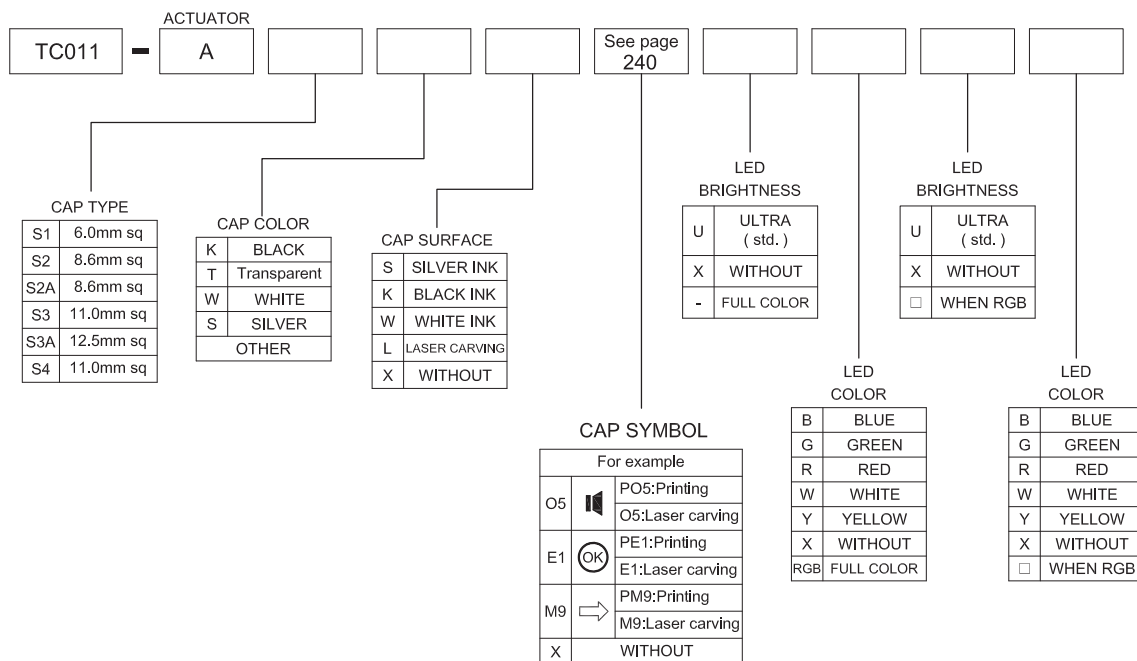


DIMENSION

TC011 - A □□ X X □□□□





TC011 - A □□ X X - RGB





CAP TYPE





S1 TYPE





S2 TYPE





S2A TYPE





S3 TYPE




S3A TYPE



S4 TYPE



CIRCUIT

SINGLE COLOR
OR
TWO COLOR


FULL COLOR

