



Feature :

SPST
Mini in dimension
Bi-color LED illuminated available
SMD and PCB terminal

Application :

Consumer products
Computer products
Instrumentation
Communication equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , SPST
CONTACT RATING	MAX. : 12 V DC , 50 mA MIN. : 1 V DC , 50 μ A
CONTACT RESISTANCE	500 m Ω MAX. 5 V DC ; 10 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 M Ω MIN. 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute
OPERATING FORCE	200 $\pm$ 80 gf
OPERATING LIFE	100,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	0.25 $\pm$ 0.1 mm
SEALING	IP67

LED SPECIFICATIONS		Value / LED Color						
 ATTENTION LEDs are Electrostatic Sensitive devices 	Unit							
		Blue	Pure Green	Red	Yellow	Orange	Green	White
LUMINOUS INTENSITY@20mA I _v	md	80	150	220	180	320	50	450
Dominant Wavelength λ_D	nm	465	525	630	590	601	567	/
FORWARD VOLTAGE@20mA V _f	V	3.3	3.2	1.95	2	2.1	2.1	3.3


■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

► HOW TO ORDER


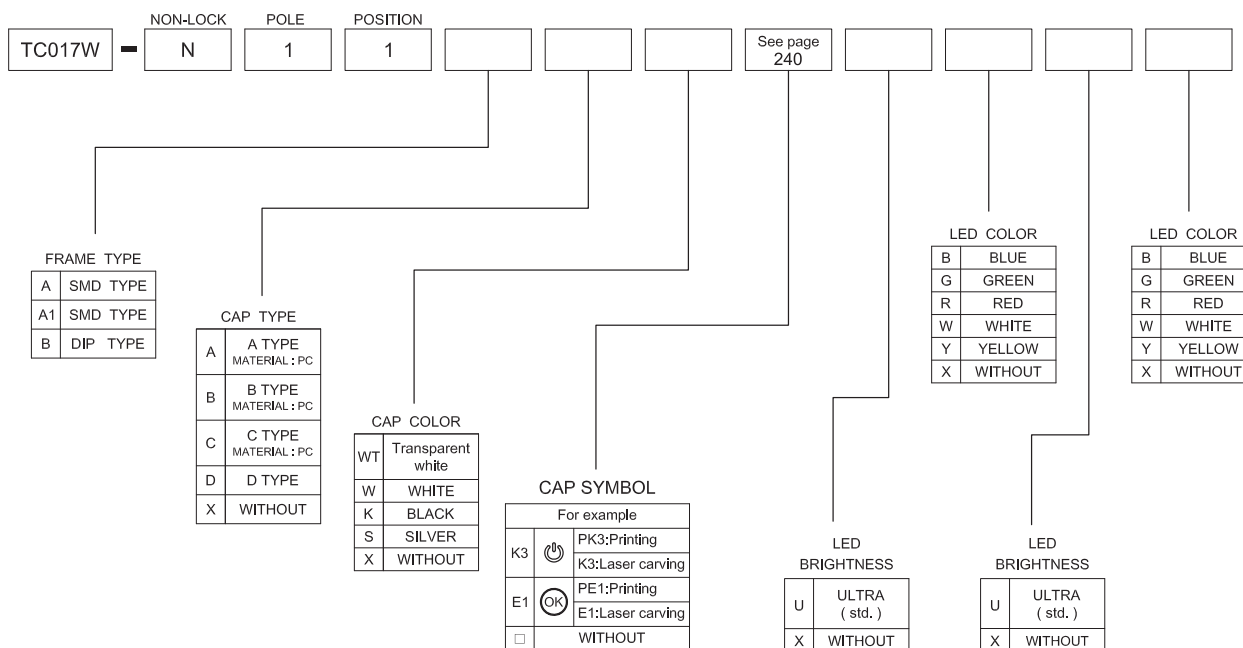


DIMENSION



TC017W-N11AXX□□□□

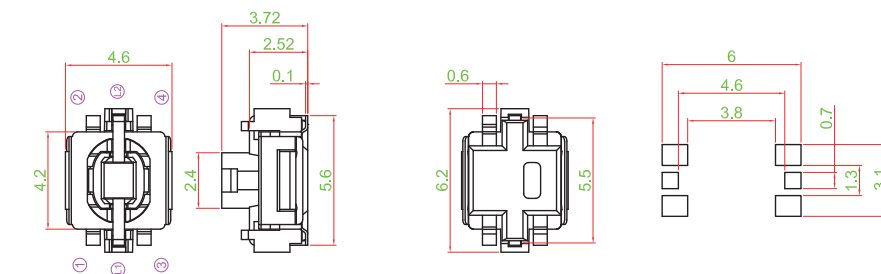


TC017W-N11A1XX□□□□

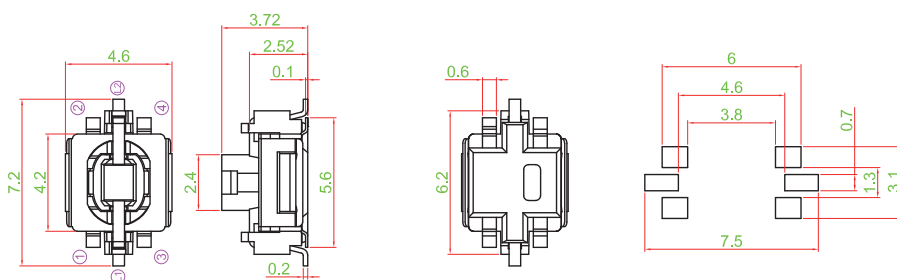




TC017W-N11BXX□□□□

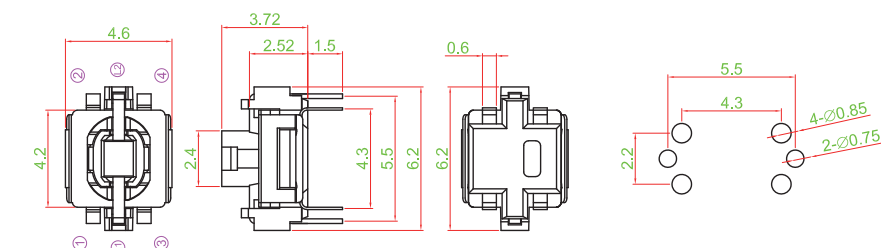




CAP TYPE





A TYPE





B TYPE



C TYPE



D TYPE



CIRCUIT

